




# P.T.B.- EGALISER-EN

Levelling mortar

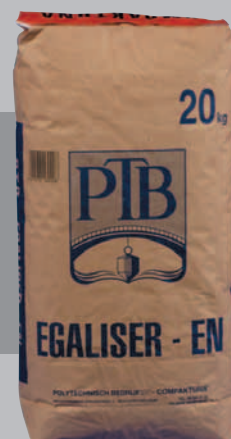


## Characteristics

P.T.B.-EGALISER-EN is a product in powder form that is used for levelling cement screeds.

P.T.B.-EGALISER-EN is not a final coat.

P.T.B.-EGALISER-EN is an excellent self-deliquescence. It has excellent adhesion properties and an increased bending and traction strength.



### Mixing ratio

± 7 l water per bag of 20 kg (± 35 %)

### Consumption

1,5 kg/mm per m<sup>2</sup>

### Packaging

20 kg

### Colours

grey

### Processing time

± 1h30

### Application temperature

+ 5 till + 30 °C

## Directions for use

Work is always conducted on a clean, stable surface. Absorbing cement screeds should be moistened in advance with a solution consisting of 1 part COMPAKTUNA®(PRO) and 4 parts water or with P.T.B.-PRIMER.

P.T.B.-EGALISER-EN is prepared with 0,350 kg water per kg of product. Always add the correct quantity of water!

Leave P.T.B.-EGALISER-EN settle for about 10 to 15 minutes before mixing it vigorously once more. The levelling is carried out in 1, 2 or 3 coats depending on the roughness of the surface. Usually, the total thickness varies from 2 to 5 mm. Because of the fine thickness of the coats, rapid drying must be avoided by switching of the heating or covering the coats. Do not apply P.T.B.-EGALISER-EN in coats of more than 4 mm per coat up to a total coat thickness of maximum 5 mm.

## Speciale Application

Any moisture rising in cement screeds can be excluded or greatly reduced by preparing P.T.B.-EGALISER-EN with 1 part COMPAKTUNA®(PRO) and 3 parts water instead of water only.

## Packaging

P.T.B.-EGALISER-EN is available in bags of 20 kg and in buckets of 10 kg. Every bag contains a polyethylene inner bag.

Refer to clause p. 2.

