



Qualities

POLYCOLORIT® is applied as a waterproof sealing and weather-resistant for villas, houses, industrial buildings, garages, warehouses, etc. Other than being easy to manipulate, POLYCOLORIT® lends itself to a perfect finish. The prime condition for ensuring proper results is invariably a clean work application surface that is free of oil and grease, dust and loose matter.



Directions for use

A base coat needs to be put down for all applications consisting of:
2 parts of POLYCOLORIT®
1 part of water
Allow to dry.
Later, two covering layers are applied with undiluted POLYCOLORIT®.



When working on damp walls or walls showing salt efflorescence (to be removed) we recommend the following composition for the first covering layer:
1 part of water
1 part of white cement
pre-mix these, then add 2 1/2 parts of POLYCOLORIT®.
The second covering layer is applied with undiluted POLYCOLORIT®.



In the case where the substrate is not ideal (unstable joints or plasterwork), we can propose a special work method using our product COMPAKTUNA®.




POLYCOLORIT® can also be applied as an anti-dust and wear-resistant coloured coating for use on concrete, cork and other cover slabs that are primarily used for pedestrian traffic. For this application, we recommend a base coat, 2 covering layers with cement and a finishing coat of undiluted POLYCOLORIT®.

Refer to clause p. 2.



+30°

+5°

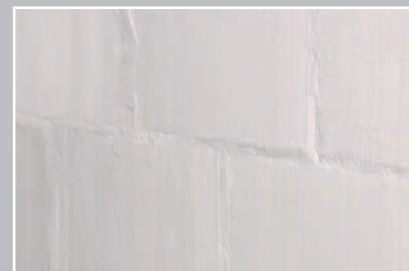

Mixing ratio	Consumption	Packaging
base coating: dilute with ± 33 % water covering coats: undiluted	base coating: ± 0,10 l/m ² covering coat: ± 0,15 l/m ²	0,70 l, 3,60 l and 7,20 l
Colours	Drying time	Application temperature
22 colours (full and pastels) ask for our colour samples	2 to 5 hours	+ 5 to + 30 °C